

Specifications

Models	GS-1932	
--------	---------	--

Measurements

	Metric	US
Working height maximum*	7.79 m	25 ft
A Platform height maximum w/load sense	5.79 m	19 ft
B Platform height - stowed	1.00 m	3 ft 4 in
C Platform length - outside	1.63 m	5 ft 4 in
extended	2.54 m	8 ft 4 in
Slide-out platform extension deck	0.91 m	3 ft
D Platform width - outside	0.74 m	2 ft 5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
E Height - stowed: folding guardrails	2.11 m	6 ft 11 in
rails folded	1.75 m	5 ft 9 in
F Length - stowed	1.83 m	6 ft
Length - stowed extended	2.74 m	9 ft
G Width	0.813 m	2 ft 8 in
H Wheelbase	1.32 m	4 ft 4 in
I Ground clearance - center	6 cm	2.4 in
A - with pothole guards deployed	2 cm	0.75 in

Productivity

Max platform occupancy (in/out) ¹	2/1	
Lift capacity	227 kg	500 lbs
Lift capacity - extension deck	113 kg	250 lb
Drive height	full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed**	25%	25%
Turning radius - inside	zero	zero
Turning radius - outside	1.55 m	5 ft 1 in
Raise / lower speed	16 / 29 sec	16 / 29 sec
Controls	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tyres - solid non-marking	30x11x20 cm	12x4.5x8 in

Power

Power source		
Hydraulic system capacity	14.2 L	3.75 gal

Sound & Vibration Levels


Sound pressure level (ground workstation)	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²

Weight***

	1,503 kg	3,313 lbs
--	----------	-----------

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC); 2006/95/EC (LVD)

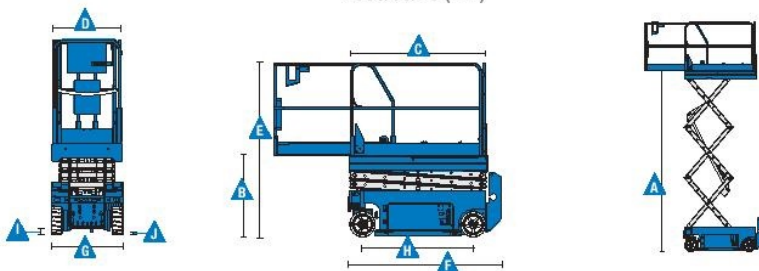

¹ Indoor use only for the 30' Series

* The metric equivalent of working height adds 2 m to platform height.

** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.