

Specifications

Models	GS-2632	
Measurements	Metric	US
Working height maximum*	9.93 m	32 ft
A Platform height maximum w/load sense	7.93 m	26 ft
B Platform height stowed	1.16 m	3 ft 10 in
C Platform length - outside	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft
D Platform width - outside	81 cm	2 ft 8 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in
A Height - stowed: folding guardrails	2.26 m	7 ft 5 in
rails folded	1.91 m	6 ft 3 in
Length - stowed	2.44 m	8 ft
A Length - extended	3.33 m	10 ft 11 in
A Width	81 cm	2 ft 8 in
H Wheelbase	1.85 m	6 ft 1 in
A Ground clearance - center	9 cm	3.5 in
A - with pothole guards deployed	2 cm	0.88 in

Productivity

Maximum platform occupancy (in/out) ¹	2/-	2/-
Lift capacity	227 kg	500 lbs
Lift capacity - extension deck	113 kg	250 lb
Drive height	full height	
Drive speed - stowed	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed**	25%	
Max outrigger levelling: front to back	—	—
Max outrigger levelling: side to side	—	—
Turning radius - inside	zero	zero
Turning radius - outside	2.13 m	7 ft
Raise / lower speed	28 / 24 sec	28 / 24 sec
Controls	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in

Power

Power source	24 V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity	17 L	4.5 gal

Sound & Vibration Levels


Sound pressure level (ground workstation)	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²

Weight***	1,959 kg	4,318 lbs
-----------	----------	-----------

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC);

2006/95/EC (LVD)

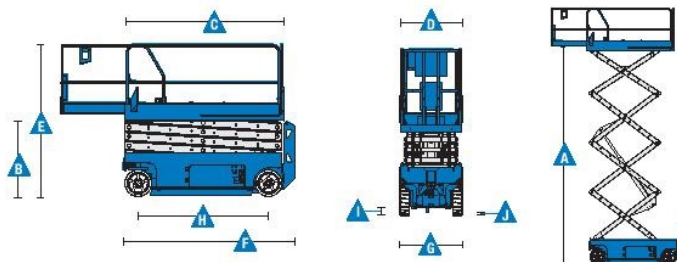

¹ Indoor use only for the GS-2632 and GS-3232

* The metric equivalent of working height adds 2 m to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.